



WWW.HAPP.COM.AU


4 Tonne



Specification

HAPP 35


2 Post Electric - Hydraulic lift






Features

- Low 2722mm column height for compact buildings
- Dual Hydraulic cylinder drive, stable lifting and lowering
- All steel balance cables for equalization, both carriages move synchronously
- Dynamically tested with 125% of rated capacity and static test with 150% of rated capacity
- CE certified (Europe and USA)
- 5mm thick columns
- 16mm thick base plate
- 20mm Tru-bolt design anchor bolts
- HAPP Ultra strong arms
- HAPP Screw up drop in pad design
- HAPP Ultra strong carriage
- 2" + 6" spacers standard
- Connector to external limit switch
- > 12 month manufacturer parts warranty
- Access to HAPP customer group buy plan
- Many options available:
 - Extra stability; big base plates, stabilizer bars
 - Low profile car ramps for very low cars
 - Oil drains for cleaner oil change operation
 - ❖ Alternate anchor bolts, extra spacers, spare motors ...

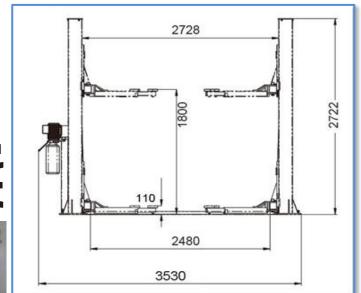

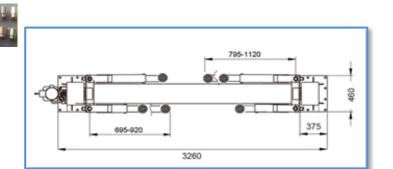

Capacity	Lifting Height *	Rise Time	Drop Time	Power Supply	Width of rack	Height of rack	Width at base plate	Pillar Width	Net Weight
4.0T	1800mm	<50s	>20s	240/415v-15A	3260mm	2722mm	3260mm	2728mm	568Kg

Specifications are subject to change without notice. Contact HAPP for additional details.