



4 Tonne

Specification



WWW.HAPP.COM.AU

Business Ready

2 Post Electric - Hydraulic lift
4T, Single point safety release,





Generation 2 robot welded Asymmetric arms

Fully robotic and CNC machine made with very latest world class technology


Features

- Australian Standards **Tested** and **Certified**
- Robot welded Asynchronous Gen 2 Arms
- Robot welded Column and Carriage
- Robot folded Column
- CNC machined parts
- Ready for use in businesses, Workplace Health and safety registration kit available
- Release both column safeties from single point
- Control cables, hoses routed overhead
- Over height protection
- Carriages move synchronously, Dual Hydraulic cylinder drive, stable lifting and lowering
- Dynamically tested with 125% of rated capacity and static test with 150% of rated capacity by HAPP to Aus Standards
- CE certified (Europe and USA)
- 5mm thick columns
- 16 mm thick base plate
- 20mm Tru-bolt design anchor bolts
- HAPP Screw up drop in pad design
- Aus std tested arm locks
- 3" + 6" spacers standard
- 5 year structural warranty
- Many options available:
 - ❖ Extra stability; big base plates, stabilizer bars
 - ❖ Low profile car ramps for very low cars
 - ❖ Oil drains for cleaner oil change operation

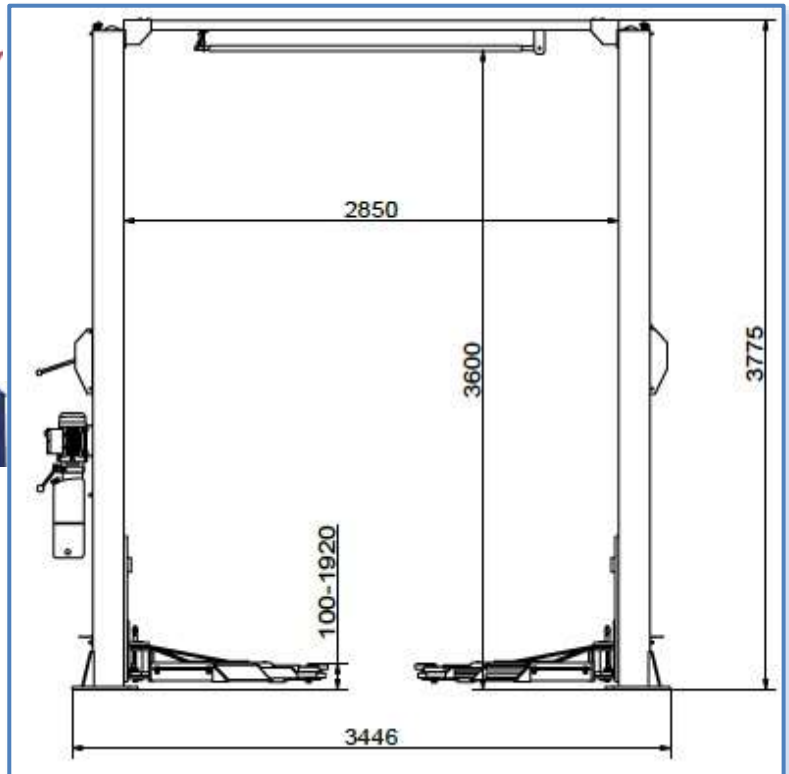

with extended range 580-1140mm and 890-1420mm
Enable easier centring of vehicles especially large 4WD on this lift and easier access to doors as vehicle can be further back on lift.

Full structural and Australian Standards analysis in Queensland Australia

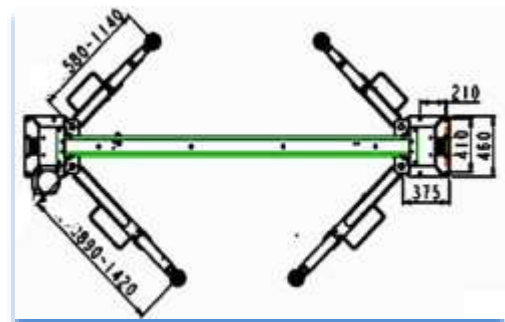

Capacity	Lifting Height *	Rise Time	Drop Time	Power Supply	Base Width	Max Height	Outside column	Inside Column	Net Weight
4.0T	1920 - 2120mm+	<50s	>20s	240/415v-15A	3446mm	3775mm	3210mm	2850mm	713Kg